

1. DESCRIPTION

The MUSTANG model Building Maintenance Unit (BMU) is a simple and economic system for all cleaning and maintenance on buildings. The cradle is designed to take **two people** together with their tools and cleaning materials, up to a **maximum working height of 60 m**.

The system consists of:

- a mobile traversing trolley with a fix or rotating spreader bar on a single jib, also enclosing the lifting mechanism and the controls,
- an aluminium cradle suspended to the trolley by galvanised steel wire ropes.

A motorised TIRAK hoist manufactured by the TRACTEL Group and specially designed for SECALT building maintenance units is used for lifting and lowering the cradle.

Access of personnel to the cradle is totally safe, with the cradle positioned on the roof next to the trolley.

All the operations are powered :

- lifting and lowering of the cradle
- traversing of the trolley
- slewing of the turret
- slewing of the spreader bar.

CE The MUSTANG machine conforms to EU Directives and is manufactured in accordance with ISO 9001.


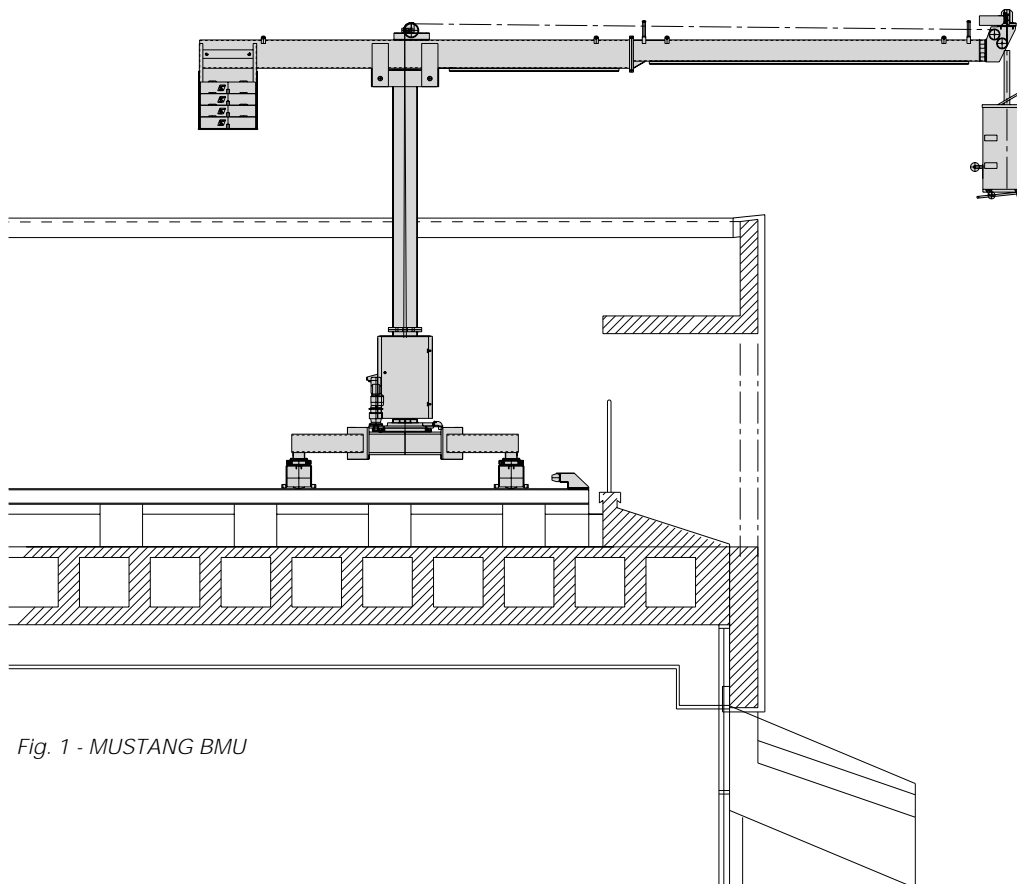


Fig. 1 - MUSTANG BMU

technical sheet

SECALT building maintenance units (BMU) MUSTANG models Mu215 and Mu318

ref.: **T-688**
rev. no.: **0**
date: **04/2003**
page: **2/7**



2. STANDARD MODELS:

model	spreader bar	max. height m	jib length m													track rails	distance d≈	fixing distance mm	
			3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	1500			1800	
Mu 215 B	Fixed	60	X	X	X	X	X									X	1000	X	
	Rotating	60	X	X	X	X										X	1000	X	
Mu 218 B	Fixed	60						X	X							X	1250		X
	Rotating	60					X	X								X	1250		X
Mu 315 B	Fixed	60						X	X	X	X	X				X	1000	X	
	Rotating	60					X	X	X	X	X					X	1000	X	
Mu 318 B	Fixed	60												X	X	X	1250		X
	Rotating	60											X	X	X	X	1250		X

2. 1. Machine identification

Mu = MUSTANG machine with 2 m cradle for 2 people

Mu 2

15

A

B = rails

2 = machine with slewing ring
3 = machine with slewing ring heavy duty

15 = wheel span 1500 mm
18 = wheel span 1800 mm

3. TECHNICAL SPECIFICATIONS

Trolley

traversing by brake motor		0.25 kW 50Hz
traversing speed		8 m/min.
lifting hoist	type	TIRAK XD-312P
nominal capacity	daN	350
safety device	type	Integrated
power supply cable		4G-2.5
useful length	m	20

Cradle

dimensions	mm	2000x600
nominal load	daN	CE version = 240 kg
= max. number of persons		2
deadweight	±kg	100
lifting / lowering speed	m/mn	8.5
control		via pendant cable
suspension wire rope	type	Ø 6.5 mm, 5 strands
number		1 + 1
diameter	mm	6.5
guaranted breaking load	daN	2840

4. DESCRIPTION OF THE EQUIPMENT

4.1 Main components

1. Turret
2. Powered slewing ring
3. Lower trolley/Central beam
4. Jib
5. Powered wheel box
6. Geared motor
7. Rear roller frame (not powered)
8. Guide wheel
9. Reeler for power supply cable
10. Counterweight
12. TIRAK XD-312P hoist with double wire rope reeler
14. Wire rope
15. Cradle
16. Support roller
17. Anti-collision bar
18. Cradle control box
19. Fixed spreader bar

4.2 Traversing trolley

The lower trolley (3) is in ST37 steel, hot dip galvanised protection. The trolley (3) and the turret (1) are connected by a powered slewing ring (2). The trolley is guided along the track by guide wheels (8) attached to the wheel box (Fig. 3).

4.3 Lifting mechanism

The lifting mechanism is the TIRAK electric traction hoist, model XD-312P, especially designed for man-riding. The operation of the TIRAK is based on the principle of pressure pulleys. The gripping of the wire rope in the pulley is achieved by a set of rollers, activated by a compression spring (Fig. 4).

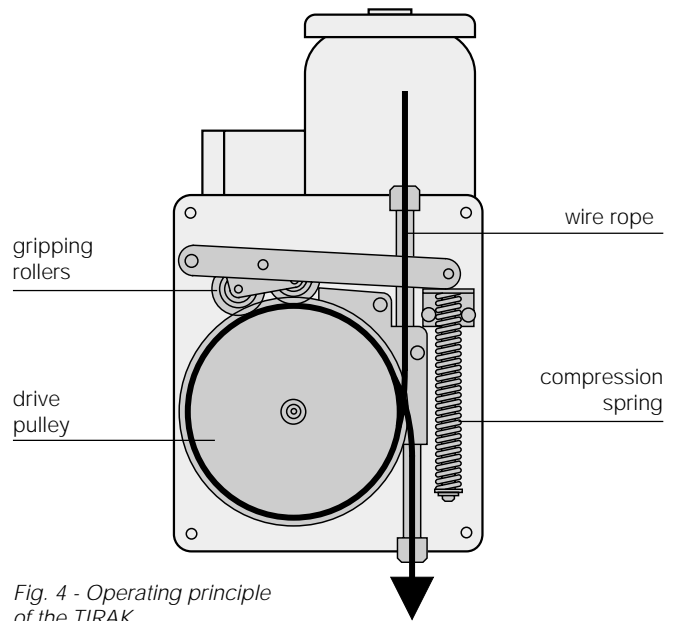


Fig. 4 - Operating principle of the TIRAK

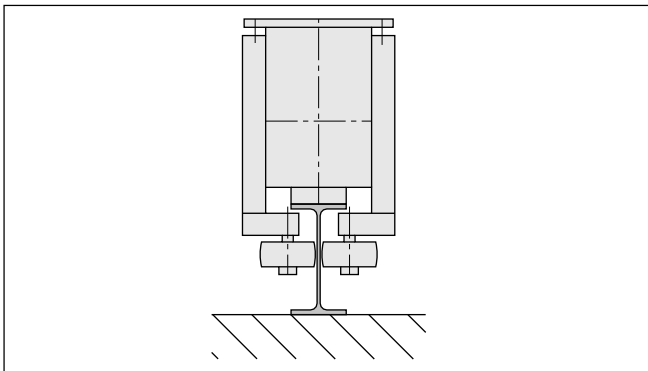


Fig. 3 - Traversing on rails

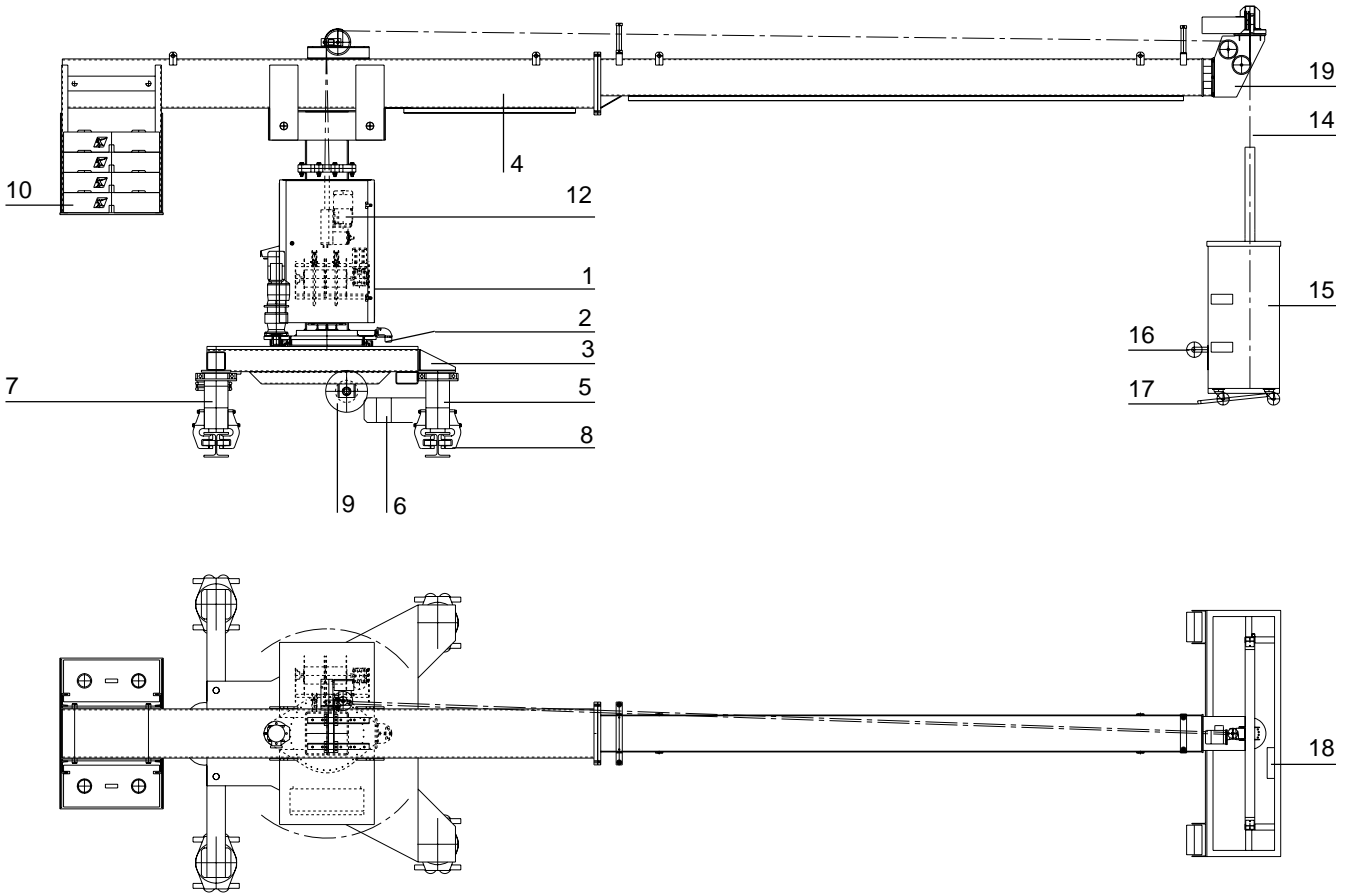


Fig. 6
Model MUSTANG

4.4 Jib

The jib (4), in tubular steel section, is fixed to the mast of the turret. The length of jib can reach 8.5 m.

4.5 Spreader bar

The spreader bar is a welded hot dip galvanised protection, that can either be fixed (19) or rotating, to bring the cradle perfectly parallel to the facade.

4.6 Electrical controls

The electrical controls consist of the following main items:

On the trolley

- the power supply cable for connecting the trolley to the power points. This cable is stored on a reeler (9) under the trolley.
- an electrical control box

On the cradle

- a control box

4.7 Cradle

The cradle (15) is a tubular aluminium structure, clad with perforated aluminium panels.

Two foam rollers (16) allow the cradle to rest lightly against the facade and absorb the swinging movements. An anti-collision bar (17) fitted under the cradle prevents collision with obstacles when lowering.

4.8 Wire ropes

The cradle is suspended from the jib by sheaved wire ropes. The TIRAK XD-312P is equipped with an overspeed safety brake. This brake acts in case of a too speedy descent of the cradle. Then the wire ropes are stored on a powered double reeler (12.1).

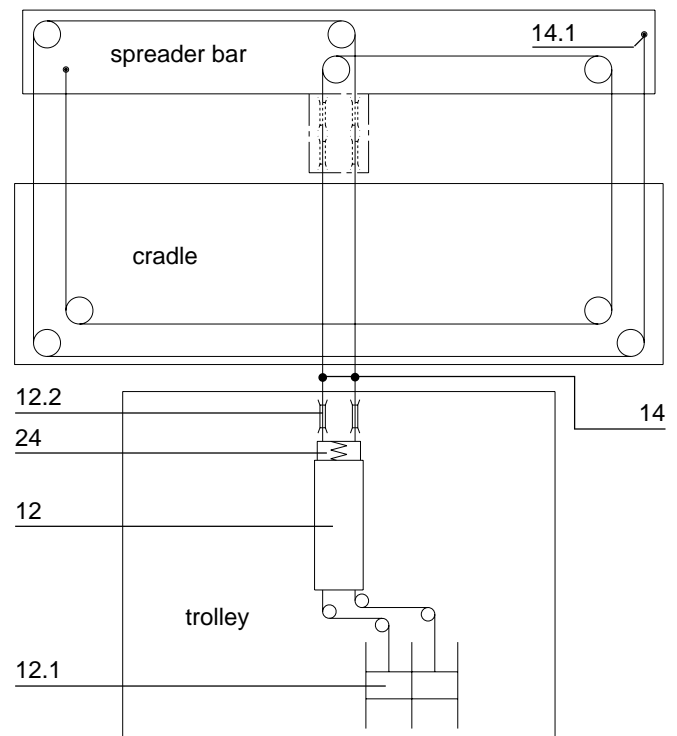


Fig. 7 - Diagrammatic representative of the wire ropes

- | | | | |
|------|-------------------------|------|--------------------------------------|
| 12 | TIRAK hoist | 14.1 | Cable attachment on the spreader bar |
| 12.1 | Double wire rope reeler | 24 | Overload safety device |
| 12.2 | Return pulley | | |
| 14 | Wire ropes | | |

4.9. CONTROLS

Selection of the control panel

The equipment has two control panels :

- 1 main control panel in the cradle (Fig. 10), connected to the trolley by a flexible cable.
- 1 control panel (Fig. 9) on the trolley for back-up operations in the event of failure of the main control panel.

The control panel is selected using the lockable switch (32) on the trolley control box.

Cradle control box

- 41. Start
- 42. Emergency stop
- 43. Lower anti-collision bar shunt
- 44. Light for overload
- 46. Lift cradle
- 47. Lower cradle
- 50. Slewing of spreader bar to left*
- 51. Slewing of spreader bar to right*
- 52. Slew turret to left*
- 53. Slew turret to right*
- 56. Traverse left
- 57. Traverse right

Trolley control box

- 26. Traverse right
- 27. Traverse left
- 31. Main switch + emergency stop
- 32. Lockable rotary switch for TROLLEY control or CRADLE control
- 34. Buzzer
- 35. Lift cradle
- 36. Lower cradle
- 37. Slew turret to right
- 38. Slew turret to left
- 39. Start

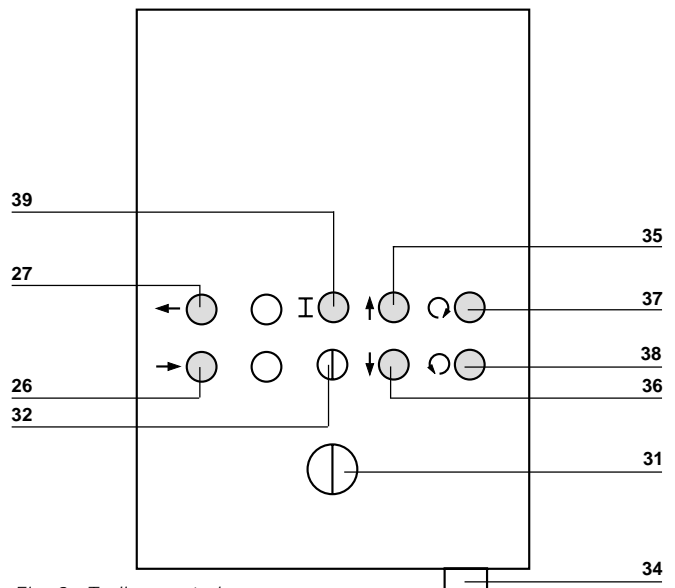


Fig. 9 - Trolley control

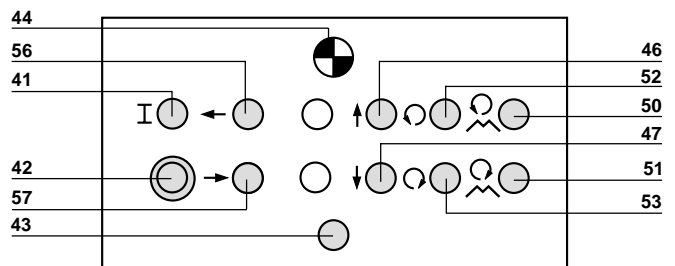


Fig. 10 - Cradle control

5. SAFETY DEVICES

To ensure safe operation without danger to personnel, the machine is fitted with a number of safety devices which monitor the correct operation of the various components and operate in the event of a breakdown or fault.

5.1. Safety devices on the cradle

- emergency stop
- lower anti-collision bar

5.2 Safety devices on the trolley

- emergency stop
- cradle upper safety limit switch
- cradle FINAL upper safety limit switch
- cradle overload safety device
- safety device
- slack wire rope safety device
- end of wire rope safety device
- electrical supply cable end limit switch
- slewing of turret
- slewing of spreader bar
- traversing end limit switch
- emergency lowering handle
- phase order safety device
- manual lowering in the event of a power break

The machine all components described in this technical sheet can be modified any time by the manufacturer without prior warning.